




Professional sound

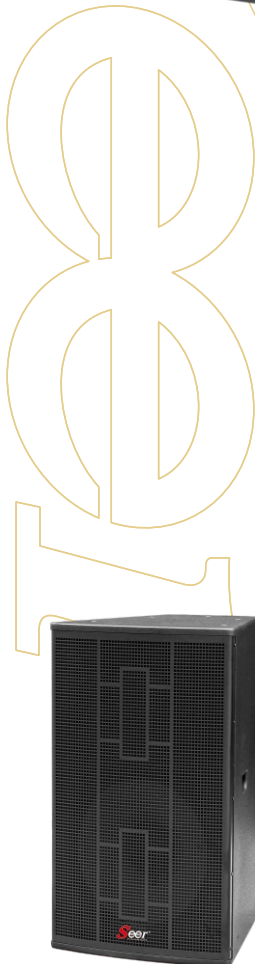

**JY-10**

**JY** series speaker is a project installation series speaker. It is special design for Church, Convention Centre, Conferences and Exhibitions, Concert Hall , Auditorium, Banquet Hall, Wedding ceremony, Club.

Thanks the mufti-angle enclosure, This series speakers are suitable for use as stage monitor. Comes up with various rigging and mounting options to meet the needs of most kinds of touring and installation applications.


JY series speakers are not only accurate sound image and high fidelity but also powerful dispersion

JY series can be pole-mounted on bass speakers ( SUB-118II, SUB-218II) as PA or satellite system.


## Specification

Frequency response	60Hz-20KHz
Directivity angle	H90° X V50°
Long-term power(RMS)	300W
Peak Power Handling	600W
Impedance	8 ohms
Sensitivity	95 dB
Maximum SPL	105dB
Connection	2XNL 4 Speakon
Enclosure Construction	15-Birch plywood
Cabinet Surface Treatment	Black Catalyzed Polyurethane Paint
Dimensions(HxWxD)	488×307.72×325mm
Low	1x10 IN(260mm)
High	1x2 IN (44mm)
N.W.	16kg


## Install Size




Front




Side




Rear




Top



Underside

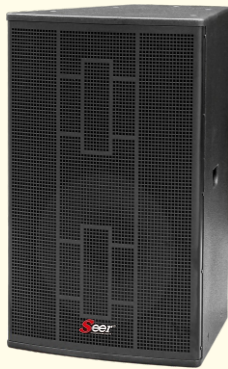


**JY-12**

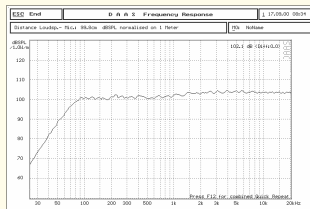

Sensitivity Curve



**JY-15**

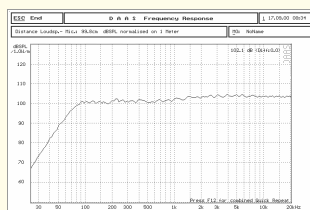


Sensitivity Curve


## Specification

Frequency response	50Hz-20KHz
Directivity angle	-----
Long-term power(RMS)	400W
Peak Power Handling	800W/5Min
Impedance	4ohms
Sensitivity	97dB
Maximum SPL	110dB(2.83v/m)
Connection	2XNL 4Speakon
Enclosure Construction	15-Birch Plywood
Cabinet Surface Treatment	Black Catalyzed Polyurethane Paint
Dimensions(HxWxD)	568×362×384mm
Low	2x12IN(310mm)
High	2INx1(44mm)
N.W.	22Kg


## Install Size




Front




Side



Rear



Top




Underside


## Specification

Frequency response	45Hz-18KHz
Directivity angle	-----
Long-term power(RMS)	500W
Peak Power Handling	1000W/5Min
Impedance	8ohms
Sensitivity	99dB
Maximum SPL	121dB(2.83v/m)
Connection	2XNL 4Speakon
Enclosure Construction	15-Birch Plywood
Cabinet Surface Treatment	Black Catalyzed Polyurethane Paint
Dimensions(HxWxD)	710×437.53×480mm
Low	1x15IN(460mm)
High	3INx1(75mm)
N.W.	31.5Kg


## Install Size




Front




Side



Rear



Top



Underside

[www.seeraudio.com](http://www.seeraudio.com)